

## AS1型空氣開關組件 Air switch assembly

### ◆ 特點和用途 Characteristic and usage

- 將電與人隔離，更加安全。

It is safer to isolate electricity from people.

- 廣泛應用於洗碗機, 垃圾粉碎機, 淨水機等家用電器的配套。

Widely used in dishwasher, garbage crusher, water purifier and other home appliances.



### ◆ 技術特性 Technical Characteristics


項目 Item		特性值 Value
工作頻率 Operating frequency		電氣 10次/min Electrical 10 cycles/min
絕緣電阻 Insulation resistance		冷態 $\geq 100\text{M}\Omega$ (500VDC); 潮態 $\geq 10\text{M}\Omega$ (500VDC) Cold state $\geq 100\text{M}\Omega$ (500VDC); Tidal state $\geq 10\text{M}\Omega$ (500VDC)
接觸電阻 Contact resistance		$\leq 50\text{m}\Omega$
耐電壓 Test voltage	同極不相接端子間 Between terminals of the same polarity	AC1000V, 50/60Hz, 1min
	帶電金屬零件與地(外殼)之間、接綫端與不帶電金屬件之間 Between current-carrying metal parts and ground(case), and between each terminal and non-current-carrying metal parts.	AC1500V, 50/60Hz, 1min
抗振動 Vibration resistance		10 ~ 55Hz, 1.5mm雙振幅 Double amplitude
插座性能 Socket performance		將插座反復拔插5000次 Unplug the socket 5000 times repeatedly
壽命 Life		電氣 $\geq 15,000$ 次; Electrical $\geq 15,000$ cycles


## ◆ 型號規格命名及含義 Model number legend and meanings

AS1 □ □ - □ □ - □ □ - ( □ )  
 1 2 3 4 5 6 7

<b>1</b> 插孔類別代號 Jack category code	A—國標 National standard B—歐標/德標 European standard/German standard C—美標 American Standard D—法標 Legal standard E—英標 British Standard F—澳標 Australian Standard	<b>4</b> 外殼結構特徵代號 Shell structure characteristic code	2個三插ST-A02-003K, 1個兩插ST-A02-002C 2—Cuboid, 156×76×95 black; 1 triple plugs ST-A02-003K, 1 two plugs ST-A02-002C
<b>2</b> 插座額定值代號 Socket rating code	10—10A 250VAC	<b>5</b> 氣動按鈕規格代號 Specification code of pneumatic button	A—ANQ1-B32B-850
<b>3</b> 微動開關規格代號 Specification code of microswitch	A—KW3AT-E21T0B-A200B	<b>6</b> 電源插頭特徵代號 Characteristic code of power plug	1—國標3插, 黑色導綫53RVV, 綫長950±50mm 1—National standard triple plugs, black wire 53 RVV, wire lenth 950±50mm 2—LBY-16(220VAC, 10A連體漏電插頭), 國標3插, 黑色導綫53RVV, 綫長1500±50mm 2—LBY-16(220VAC, 10A leakage plug with head), national standard triple plugs, black wire 53RVV, wire lenth 1500±50mm
<b>4</b> 外殼結構特徵代號 Case structure characteristic code	1—長方體, 123×75×54.5 黑色; 1個三插 1—Cuboid, 123×75×54.5 black; 1 triple plugs 2—長方體, 156×76×95 黑色;	<b>7</b> 附加代號 Additional code	與標準規格有不同處, 用01,02……表示。 There are differences with the standard specifications, shows as 01,02……

## ◆ 內部構造圖 Internal configuration drawing

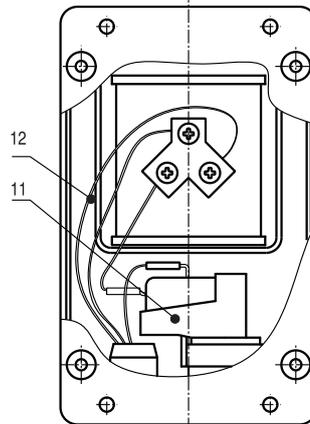


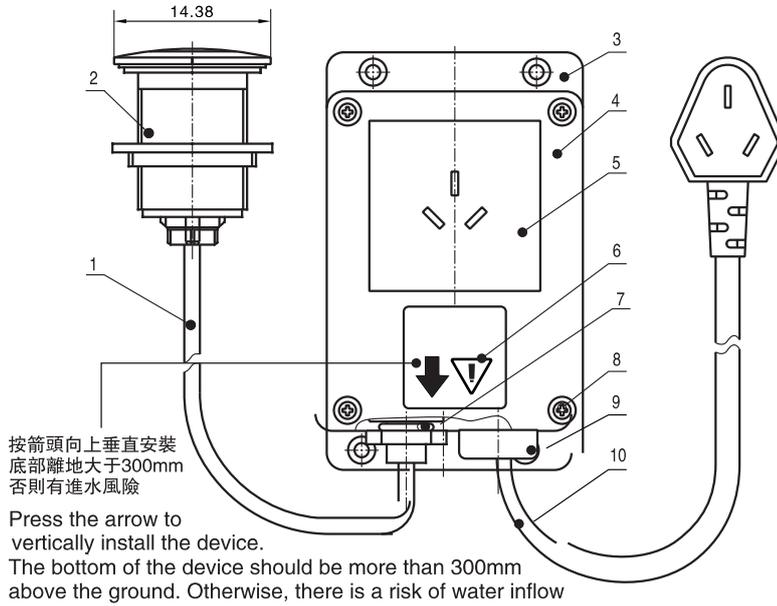


- |            |                           |
|------------|---------------------------|
| 1: PVC氣管   | PVC trachea               |
| 2: 氣動按鈕    | Pneumatic button          |
| 3: 基座      | Case                      |
| 4: 蓋       | Cover                     |
| 5: 插座      | Socket                    |
| 6: 標識卡     | Identification card       |
| 7: O形圈     | O-ring                    |
| 8: 自攻螺釘    | Self tapping screw        |
| 9: 綫扣      | Cord buckle               |
| 10: 電源綫    | Power cord                |
| 11: 氣動壓力開關 | Pneumatic pressure switch |
| 12: 導綫組件   | Wire assembly             |

注: 11,12 見上頁圖 ( PS:11,12 see last page drawing )

◆ 外形和安裝尺寸 Outline and mounting dimensions

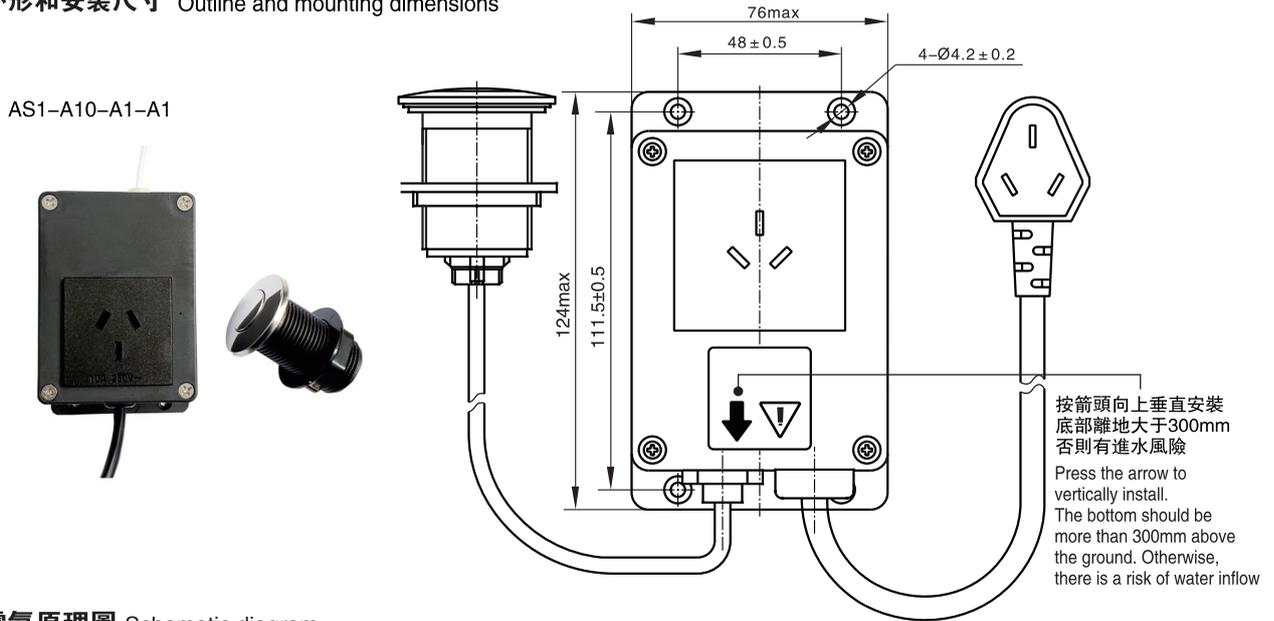

◆ 電氣原理圖 Schematic diagram

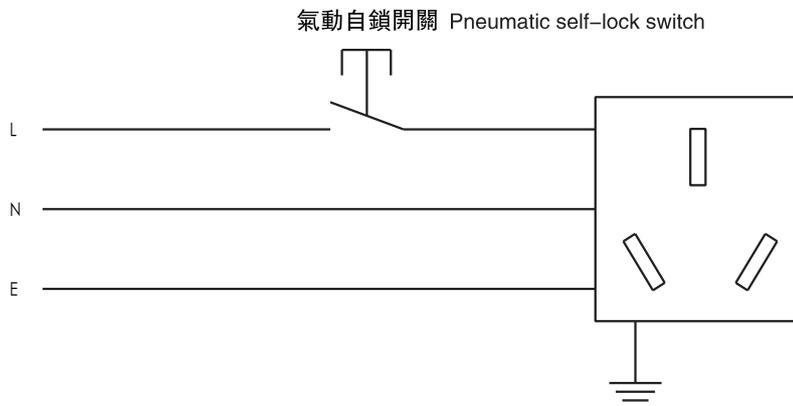

To provide a safe and reliable on-off service let electric appliances more perfect