

SP02型門控開關 Gating control switch


- ◆ 特點和用途 Characteristics and usage
 - 按鈕式開關，結構緊湊，安裝方便。
Push plunger power switch, tight configuration, convenient to mount
 - 接觸可靠，工作壽命長
Contact reliable, long operating life
 - 用于電烤箱及類似設備的門控。
Can be used in gating switch in electronic oven and other similar equipments



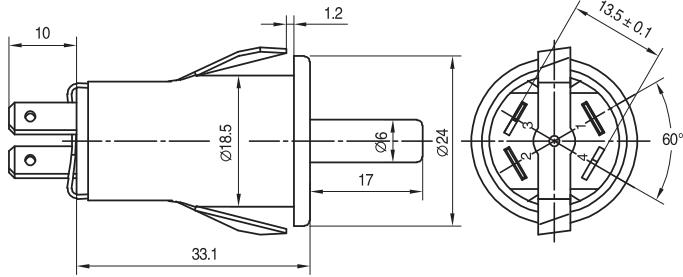

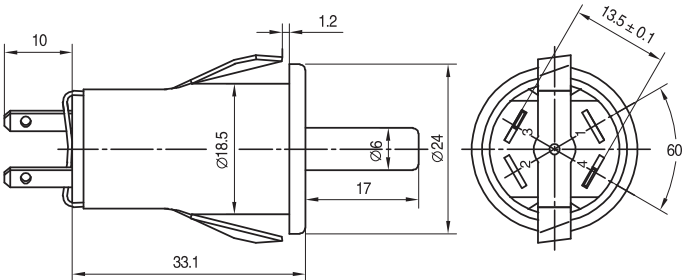

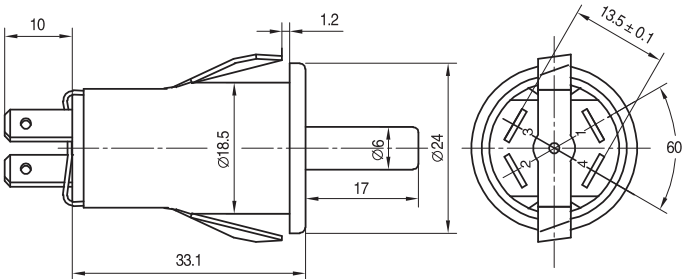
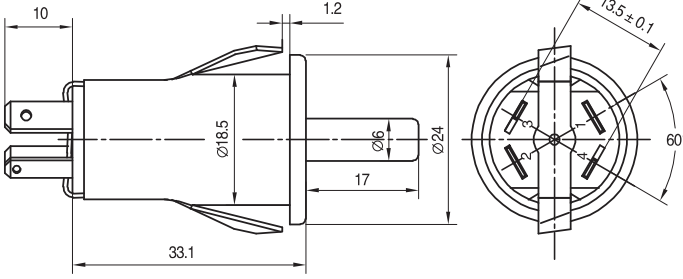
◆ 技術特性 Technical Characteristics

項目 Item		特性值 Value
環境溫度 Environment temperature		0 ~ 200℃
相對濕度 Relative humidity		95%, 40℃
額定電流 Rated current		2A
額定電壓 Rated voltage		AC125V/250V
工作行程/全行程 Operating travel/total travel		1.5mm/15mm
動作力 Operating force		5 ± 1.5N
絕緣電阻 Insulation resistance		≥ 100MΩ (DC500V)
接觸電阻 Contact resistance		≤ 30mΩ
耐電壓 Test voltage	端-端 Terminal-terminal	AC1000V
	端-殼 Terminal-case	AC1500V
電氣壽命 Electrical life		100,000次/cycles
質量 Weight		約 15 g Approx. 15g
安全認證 Safety approvals		UL、CUL

◆ 安裝孔尺寸 Mounting hole dimensions



◆ 外形尺寸 Outline dimensions

SP02-Z		電路圖 Circuit diagram 
SP02-T		電路圖 Circuit diagram 
SP02-D		電路圖 Circuit diagram 
SP02-S		電路圖 Circuit diagram 